



The boron-doped diamond for an all-in-one system of mineralization and detection of lead in waters

Luca Pujol, David Evrard, Pierre Gros, Mathilde Freyssinier, Audrey Ruffien-Cizsak, Karine Groenen-Serrano

► To cite this version:

Luca Pujol, David Evrard, Pierre Gros, Mathilde Freyssinier, Audrey Ruffien-Cizsak, et al.. The boron-doped diamond for an all-in-one system of mineralization and detection of lead in waters. ChemElectroChem, 2019, 6 (4), pp.1225-1228. 10.1002/celec.201801717 . hal-02052102

HAL Id: hal-02052102

<https://hal.science/hal-02052102>

Submitted on 28 Feb 2019

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.







Open Archive Toulouse Archive Ouverte (OATAO)

OATAO is an open access repository that collects the work of Toulouse researchers and makes it freely available over the web where possible

This is an author's version published in: <http://oatao.univ-toulouse.fr/22933>

Official URL: <https://doi.org/10.1002/celc.201801717>

To cite this version:

Pujol, Luca  and Evrard, David  and Gros, Pierre  and Freyssinier, Mathilde and Ruffien-Cizsak, Audrey and Groenen Serrano, Karine  *The boron-doped diamond for an all-in-one system of mineralization and detection of lead in waters.* (2019) ChemElectroChem, 6 (4). 1225-1228. ISSN 2196-0216

Any correspondence concerning this service should be sent to the repository administrator: tech-oatao@listes-diff.inp-toulouse.fr

Boron-Doped Diamond as an All-In-One System for the Mineralization and Detection of Lead in Waters


Luca Pujol,^[a, b] David Evrard,^[a] Pierre Gros,^[a] Mathilde Freyssinier,^[b] Audrey Ruffien-Cizsak,^[b] and Karine Groenen Serrano^{*[a]}

Boron-doped diamond (BDD) electrodes were used in a single-compartment electrochemical cell to monitor the degradation of organic matter (OM) and the detection of lead in water. Using sulfuric acid as the electrolyte, the mineralization step was almost complete after 20 min under galvanostatic electrolysis conditions, irrespective of the OM [i.e. phenol or humic acid (HA)]. Nevertheless, H₂SO₄ was not suitable for samples containing Pb(II), as it induces PbSO₄ precipitation. On the other hand, the use of HNO₃ resulted in a decrease in the HA degradation yield to 30%, but remained at 90% for phenol without any interference with respect to lead detection. Under these latter experimental conditions, the assay of Pb(II) was performed by using differential pulse anodic stripping voltammetry. The BDD electrode exhibited a linear response in the range 1–10 ppm with a normalized sensitivity of 2.66 nC ppm⁻¹ min⁻¹. Accurate results were obtained in solutions containing 20 ppm phenol, as compared to reference technique analysis.

Owing to their widespread occurrence in natural media and especially water,^[1] trace metals represent a growing environmental and health threat.^[2] Among them, lead (Pb) is one of the most toxic, since it can cause adverse health effects such as renal failure, cardiovascular or neurologic diseases or even death.^[3] Its high toxicity combined to bioaccumulation phenomena all along the trophic chain make it deleterious even at very low concentration.^[4] Pb is released in the environment by many industrial processes, including mining operations and ore processing, metallurgy and electroplating, chemical industries, dyes and pigments or petroleum refining.^[5] Consequently, it is considered as one of the most abundant and toxic trace metal pollutants.^[6] Thus, there is an urgent need for the development of sensors dedicated to Pb(II) determination. Electrochemistry is particularly well-suited to face this critical challenge since it allows sensitive, reliable and cheap sensors to be built.^[7]

However, water generally contains natural organic matter (OM), mainly as its humic or fulvic acid forms,^[8] or other organics originating from anthropogenic activities (pesticides, pharmaceuticals, and so on).^[9] These latter OM can severely hamper the electrochemical detection of trace metals by acting as a complexing agent.^[10] Figure 1 shows for instance the differential pulse anodic stripping voltammograms (DPASVs) recorded for two different Pb(II) concentrations in the absence and presence of OM. Phenol and humic acid (HA) were chosen to stand for anthropogenic and natural OM, respectively. Whatever the Pb(II) concentration and the kind of OM considered, the Pb(0) reoxidation signal recorded around –0.43 V showed an almost 50% decrease when OM was present in the solution. This result clearly shows that OM makes a great part of the metallic cations unavailable for electrochemical preconcentration and subsequent stripping detection. Thus, OM removal has to be considered a mandatory step prior to Pb(II) electrochemical determination. This removal process can be easily achieved by electrochemical means.^[11]

In this context, boron doped diamond (BDD) appears to be a material of interest since it can advantageously fix both issues: on the one hand, BDD has been successfully used to detect trace metals such as Pb(II)^[7] and, on the other hand, it has demonstrated very good performances in OM degradation by producing strong oxidizing agents such as hydroxyl radicals ([•]OH) from water discharge reactions.^[12] Thus, we have recently designed a 5-mL mineralization cell including two BDD electrodes of 2.25 cm² active surface area as anode and cathode.^[13] It is worth noting that this latter cell does not include any separator. Indeed, a membrane separator was first added to the cell in order to prevent metal cations reduction at the cathode. However, in our case preliminary tests conducted in 0.5 M HNO₃ (not shown) highlighted that the use of a Nafion[®] separator induced a metal loss around 15–25% depending on the initial Pb(II) concentration, due to adsorption phenomena on the membrane surface. On the contrary, mineralization performed in the absence of separator lead to metal loss lower than 2%. This result is very surprising considering that Pb(II) is expected to both oxidize and reduce following Reactions (1) and (2).^[14]



This apparent lack of reactivity of Pb(II) can be accounted for considering the very high current used for the electrolyses, ca. 0.5 A ($j = 0.22 \text{ A cm}^{-2}$), compared to that of Pb(II) oxidation

[a] L. Pujol, D. Evrard, P. Gros, Prof. K. Groenen Serrano
Laboratoire de Génie Chimique
Université de Toulouse, CNRS, INP, UPS
Toulouse, France
E-mail: serrano@chimie.ups-tlse.fr

[b] L. Pujol, M. Freyssinier, A. Ruffien-Cizsak
ARCYS
14 place Marcel Dassault, Blagnac, France
An invited contribution to a Special Collection dedicated to Trends in
Synthetic Diamond for Electrochemical Applications

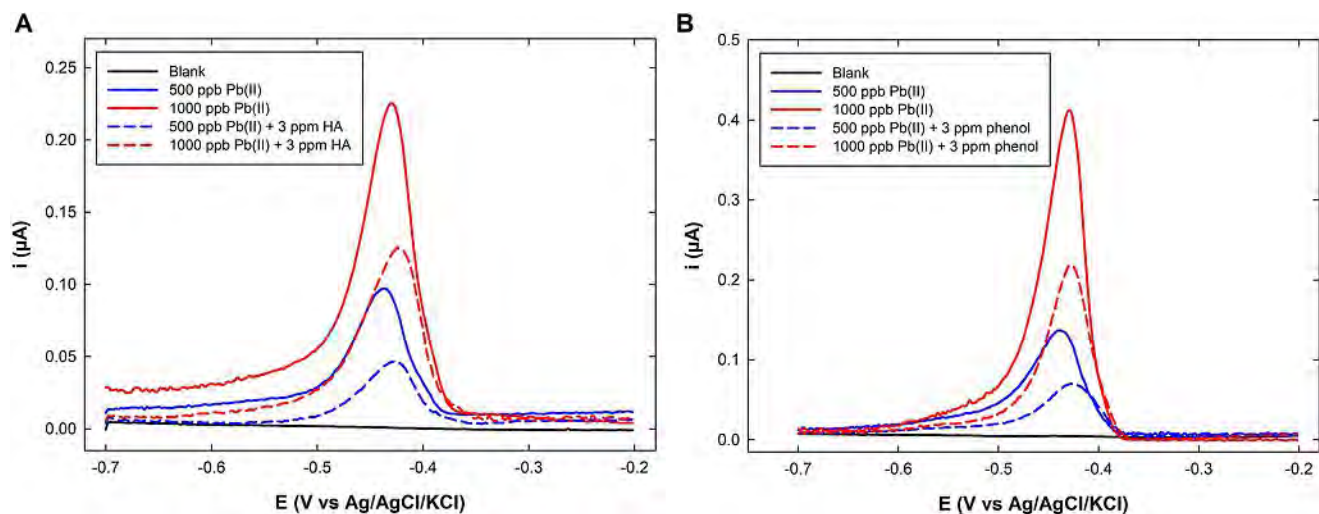


Figure 1. DPASVs recorded on a BDD electrode in 0.01 M HNO_3 containing 500 ppb (blue lines) or 1000 ppb (red lines) Pb(II) in the absence (solid lines) or presence (dashed lines) of 3 ppm A) HA or B) phenol.

or reduction (ratio of 3000): in such harsh conditions, very important amounts of dioxygen and hydrogen are produced at the anode and cathode, respectively, resulting in a bubble “curtain” close to the electrode surfaces. These curtains prevent Pb(II) access to the electrode surface, and subsequent electron transfer process.

The efficiency of OM degradation using different electrolytes was then checked. Figure 2 depicts the evolution of the temporal total organic carbon (TOC) removal during the electrolysis. In 0.5 M HNO_3 , TOC removal reached 90% after 20 min starting from 20 ppm phenol, showing that this latter compound was satisfactorily mineralized under the experimental conditions used (Figure 2). This results contrasts with the report by Cañizares et al.,^[15] who have evidenced the formation of polymers during the electro-oxidation of nitrogenated aromatics using a BDD anode. In our case the very high current used allows phenol to be mineralized directly without the

formation of any intermediary species.^[16] On the contrary, starting from 20 ppm HA, TOC removal only reached 30% at the end of the electrolysis, indicating that HA was only partially mineralized. This very low TOC removal may be due to the fact that HA degradation secondary products hardly reacts with the OH^\bullet radicals, thus leading to incomplete OM mineralization.^[17] It is worth noting that others studies have reported that the electrochemical degradation of HA was achieved on dimensionally stable anode (DSA) using sodium chloride as electrolyte,^[18] but in this case the role of undesired chlorinated species formed during the process was not discussed.

In order to improve the mineralization process, another set of experiments was conducted using H_2SO_4 electrolyte. In such a medium, both phenol and HA exhibited TOC removals higher than 90%, indicating that the OM degradation was almost complete. This result is due to the fact that sulfuric acid has to be considered an “active electrolyte”.^[19] Indeed, it has been proved that on BDD, sulfate anions can generate very strong oxidizing agents such as sulfate radicals $\text{SO}_4^{\bullet-}$.^[20] These latter radicals are more likely to participate in electron transfer reactions and promotes the decarboxylation of carboxylic acids,^[21] contrary to OH^\bullet which rather participates in hydrogen abstraction or addition reactions but has very low rate constant with ammonia,^[22] fulvic acid and humic acid.^[21a] Zhou et al. have compared the rate constants of reactions between chemicals and OH^\bullet or $\text{SO}_4^{\bullet-}$ and have showed that most of the rate constants of OH^\bullet were higher than those of $\text{SO}_4^{\bullet-}$.^[23]

However, it is noteworthy that H_2SO_4 is actually not a suitable medium for OM mineralization if subsequent Pb(II) trace determination is envisaged, due to the solubility constant value of 1.6×10^{-8} for PbSO_4 ; although Pb(II) is present at very low amounts (between 0.5 and 10 ppm, see Figure 3), the very high SO_4^{2-} concentration (0.5 M) implies the formation of solid Pb(II) sulfate. Thus, with the aim of Pb(II) determination after OM mineralization, this latter process was performed in HNO_3 .

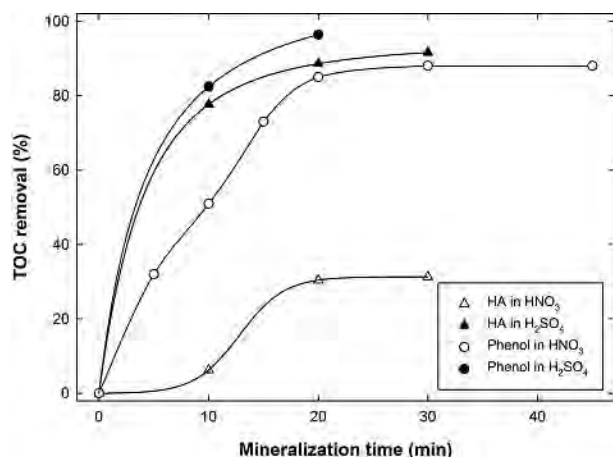


Figure 2. Variation of TOC during electrolysis of solutions containing organic matter (HA: triangles, phenol: circles), using 0.5 mol L^{-1} H_2SO_4 (black symbols) or HNO_3 (white symbols), $[\text{TOC}]_0 = 20$ ppm, $i = 0.5$ A ($j = 0.22$ A cm^{-2}).

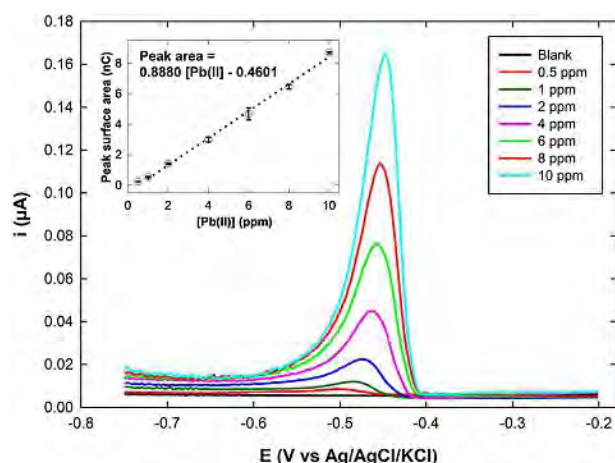


Figure 3. DPASVs recorded in 0.01 M HNO₃ containing Pb(II) ranging from 0.5 to 10 ppm (BDD surface area = 0.196 cm²). Inset: corresponding calibration curve. All measurements were repeated at least twice.

In order to test the capability of BDD with respect to Pb(II) trace determination, successive amounts of Pb(II) were added to a 0.01 M HNO₃ solution and the corresponding DPASVs were recorded (Figure 3). Under the experimental conditions used (See Experimental Section for DPASV parameters), the BDD electrode exhibited a linear response in the range 1–10 ppm Pb (II), with a correlation coefficient of 0.996 (Figure 3, inset). From the slope of the calibration curve, the normalized sensitivity with respect to preconcentration duration was calculated 2.66 nC ppm⁻¹ min⁻¹. For each Pb(II) concentration, DPASVs were recorded at least twice, highlighting a good repeatability of the measurements. The limit of detection (LOD) and limit of quantification (LOQ) were estimated 0.55 ppm and 0.6 ppm, respectively, using Equations (3) and (4):

$$\text{LOD} = B + 3\sigma \quad (3)$$

$$\text{LOQ} = B + 10\sigma \quad (4)$$

where B and σ are the average value and the standard deviation of the baseline, respectively. For this purpose, 10 successive baselines were recorded.

Finally tests combining both a mineralization and a detection step were conducted. Two 0.01 M HNO₃ solutions containing 20 ppm phenol were spiked with 5 and 8 ppm Pb(II), respectively. Both solutions were mineralized for 20 min prior to record DPASVs. The as-obtained Pb(II) concentrations were compared to reference technique analysis, namely inductively coupled plasma – atomic emission spectroscopy (ICP-AES). The results are summarized in Table 1.

Table 1. Pb(II) concentrations obtained by ICP-AES and DPASV after OM mineralization.		
Solutions [ppm]	DPASV [ppm]	ICP-AES [ppm]
5	5.27	4.9
8	7.83	8.2

For both concentrations, the values found after electrochemical mineralization were very close to that obtained by ICP-AES, thus demonstrating the reliability of the proposed system which combines OM electrochemical degradation and trace metal electrochemical detection.

In conclusion, this preliminary work demonstrated the interest of BDD as electrode material for an all-in-one system of mineralization and detection of lead in waters. Nitric acid was proven as an electrolyte of choice, which ensured the almost complete degradation of phenol under galvanostatic electrolysis conditions. Under these conditions, the detection of lead was then possible without any interference. The analytical performances were found to be in accordance with reference techniques and suitable for the analysis of industrial wastes. Studies are currently in progress to widen this proof-of-concept to other kinds of organic matter and trace metals.

Experimental Section

Nitric acid and sulfuric acid were of analytical grade (VWR). A standard solution of Lead of 1000 mg L⁻¹ in 2 mol L⁻¹ nitric acid Specpure was used (Alfa Aesar). Phenol and humic acid sodium salt purchased from Sigma-Aldrich were of analytical and technical grade, respectively. All chemicals were used as received.

Mineralization

Electrolyses were performed in a home-made, 5-mL single-compartment cell under galvanostatic conditions at 0.5 A for varying durations. Both anode and cathode were BDD plates of 2.25 cm² geometrical surface area, the inter-electrode gap was 24 mm.

TOC analysis was carried out by using a Shimadzu TOC-VSCN total organic carbon analyzer. Pb(II) concentration was measured using inductively coupled plasma – atomic emission spectroscopy (ICP-AES, HORIBA Ultima 2).

Electrochemical Detection

All the electroanalytical experiments were performed at room temperature using a Metrohm μ -Autolab III potentiostat interfaced to a personal computer and controlled with NOVA 1.11 software package. All solutions were prior mineralized without any deaeration. A classical three-electrode glass cell was used with a Metrohm platinum rod and a Radiometer Ag/AgCl/KCl(saturated) electrode connected to the cell by a capillary as counter and reference electrode, respectively. All the potentials are given with respect to this reference. Working electrode was a BDD electrode of 0.196 cm² geometrical surface area.

DPASV experiments were performed in a 0.01 M HNO₃ solution using the following conditions: cleaning potential = 1.2 V, cleaning time = 150 s; preconcentration cathodic potential = -1.2 V, preconcentration time = 20 s; pulse amplitude = 25 mV, step amplitude = 5 mV, pulse time = 25 ms, scan rate of 25 mV s⁻¹; anodic stripping from -0.8 to -0.2 V. During the preconcentration step, the solution was stirred. All the measurements were repeated at least twice.

Conflict of Interest

The authors declare no conflict of interest.

Keywords: boron-doped diamond anode · electrochemical detection · electrochemical mineralization · lead detection · trace metals

- [1] E. Callender, *Treatise on Geochemistry* **2004**, 9, 67–105.
- [2] Q. Mahmood, A. Rashid, S. S. Ahmad, M. R. Azim, M. Bilal, *Environ. Pollut.* **2012**, 21, 35–69.
- [3] W. Maret, *Met. Ions Life Sci.* **2017**, 17, 1–20.
- [4] D. K. DeForest, K. V. Brix, W. J. Adams, *Aquat. Toxicol.* **2007**, 84, 236–246.
- [5] P. C. Nagajyoti, K. D. Lee, T. V. M. Sreekanth, *Environ. Chem. Lett.* **2010**, 8, 199–216.
- [6] J. O. Nriagu, J. M. Pacyna, *Nature* **1988**, 333, 134–139.
- [7] L. Pujol, D. Evrard, K. Groenen-Serrano, M. Freyssinier, A. Ruffien-Cizsak, P. Gros, *Front. Chem.* **2014**, 2, 19.
- [8] C. Steelink, *J. Chem. Educ.* **1977**, 54, 599–603.
- [9] J. C. G. Sousa, A. R. Ribeiro, M. O. Barbosa, M. F. R. Pereira, A. M. T. Silva, *J. Hazard. Mater.* **2018**, 344, 146–162.
- [10] J. H. Reuter, E. M. Perdue, *Geochim. Cosmochim. Acta* **1977**, 41, 325–334.
- [11] I. Sires, E. Brillas, *Environ. Int.* **2012**, 40, 212–229.
- [12] C. A. Martínez-Huitle, M. A. Rodrigo, I. Sirés, O. Scialdone, *Chem. Rev.* **2015**, 115, 13362–13407.
- [13] L. Pujol, A. Ruffien-Cizsak, M. Freyssinier, K. Serrano-Groenen, P. Gros, D. Evrard, *Process of determination of metal compounds in solution*. Fr. Demande (2017), FR 3038386 A1 20170106.
- [14] A. J. Saterlay, C. Agra-Gutiérrez, M. P. Taylor, F. Marken, R. G. Compton, *Electroanalysis* **1999**, 11, 1083–1088.
- [15] P. Cañizares, J. Lobato, R. Paz, M. A. Rodrigo, C. Sáez, *Water Res.* **2005**, 39, 2687–2703.
- [16] E. Weiss, K. Groenen-Serrano, A. Savall, *J. Appl. Electrochem.* **2008**, 38, 329–337.
- [17] B. P. Chaplin, *Environ. Sci. Process. Impact* **2014**, 16, 1182–1203.
- [18] L. Pinheiro, R. Pelegrini, R. Bertazzoli, A. J. Motheo, *Appl. Catal. B-Environ.* **2005**, 57, 75–81.
- [19] Y. Lan, C. Coetsier, C. Causserand, K. Groenen-Serrano, *Electrochim. Acta* **2017**, 231, 309–318.
- [20] K. Serrano, P. A. Michaud, C. Comninellis, A. Savall, *Electrochim. Acta* **2002**, 48, 431–436.
- [21] a) H. Lutze, Sulfate radical based oxidation in water treatment, Universität Duisburg-Essen, 2013; b) P. Neta, V. Madhavan, H. Zemel, R. W. Fessenden, *J. Am. Chem. Soc.* **1977**, 99, 163–164; c) M. M. Ahmed, S. Barbat, P. Doumenq, S. Chiron, *Chem. Eng. J.* **2012**, 197, 440–447.
- [22] Y. Deng, C. M. Ezyske, *Water Res.* **2011**, 45, 6189–6194.
- [23] D. Zhou, H. Zhang, L. Chen, *J. Chem. Technol. Biotechnol.* **2015**, 90, 775–779.